## **2 Ton Bladder Jacks**MODEL 92040 & 92041





- Easy Operation Up & Down Function Simple to Use.
- Designed for constant use in professional and hobbyist environments.
  - Small compact design Great for Shops, Hobbyist, or service vehicles.
- Popular choice for collision repair shops for use with frame machines.
- Ideal for use in brake, suspension, tire/wheel and many other applications.
- 100% Air up and Air Down.
- Built in Stabilization Cylinder.
- Low Profile Bladder Jack Minimum Height of 4.5 in. (92040).


  Available in 2 & 3 Stage Styles

(More Details on Back)



## ESFI

## We Keep Your Equipment

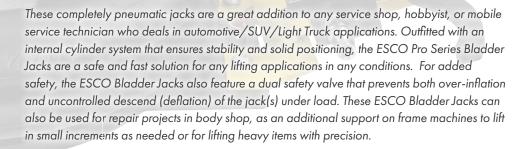

The ESCO Pro Series Bladder Jacks provide up to 4,000 lbs. (2 Tons) of lifting capacity and 100% air operated, with a working air pressure of 100-145 psi. Both Jacks have optional lifting extensions of 3 in. and 2.25 in. The two and three bag bladder designs, have low profile starting points ranging from 4.5-7.9 in. and Maximum Lifting Heights from 17-22 in. (including extension). The ESCO Pro Series Bladder Jack(s) are built to the same quality standards of all ESCO lifting and support equipment and come with a 1-Year Warranty.


Model # Description	<b>92040</b> 2-Stage	<b>92041</b> 3-Stage
Capacity	2 Ton (4,000 lbs.)	2 Ton (4,000 lbs.)
Working Air Pressure	100-145 PSI	100-145 PSI
A (Min. Height)	4.5 in. (115mm)	7.9 in. (200mm)
A+B+C (Max. Height)	17 in. (430mm)	22 in. (560mm)
B (Lifting Height)	9.25 in. (235mm)	11.8 in. (300mm)
C (Extension Height)	3 in. (80mm)*	2.25 in. (60mm)**
D (Width)	10.4 in. (265mm)	9.8 in. (250mm)


\* Included with 92040


\* \* Included with 92041














NOTE: ESCO reserves the right to change, alter, or modify product(s) without notice. This includes but is not limited to product: color, design, parts, accessories, etc.

sales@esco.net WWW.ESCO.NET 1.800.352.9852











