


Pneumatic Torque Wrenches- Specifications & Models


OSHA




MODEL NUMBER	10002	10024	10001	10015	10017
Square drive	3/4"	1"	1"	1"	1 1/2"
Min. Torque (Ft/Lbs)	130	300	460	1005	1525
Max. Torque (Ft/Lbs)	530	1030	2015	3070	5990
Min. Torque (Nm)	176	407	624	1362	2067
Max. Torque (Nm)	718	1396	2732	4162	8120
Dimension A (in)	7.89"	7.89"	7.89"	8.06"	8.69"
Dimension A (mm)	200.4	200.4	200.4	204.7	220.7
Square Drive B (in)	0.75"	1"	1"	1"	1.5"
Square Drive B (mm)	19.05	25.4	25.4	25.4	38.1
Dimension C (in)	6.80"	8.87"	9.40"	10.62"	12.32"
Dimension C (mm)	172.7	225.3	238.8	269.7	312.9
Diameter D (in)	2.56"	2.85"	3.09"	3.75"	5.00"
Diameter D (mm)	65.0	72.4	78.5	95.3	127.0
Weight (Lbs)	9	12	16	20	36
Weight (Kg)	4.1	5.5	7.3	9.1	16.3
Performance Data (RPM)					
- RPM @ 20 psi	26	11	6	3	2
- Tool Max psi	80 psi	70 psi	90 psi	65 psi	90 psi
- RPM @ MAX psi	44	15	9	4	3

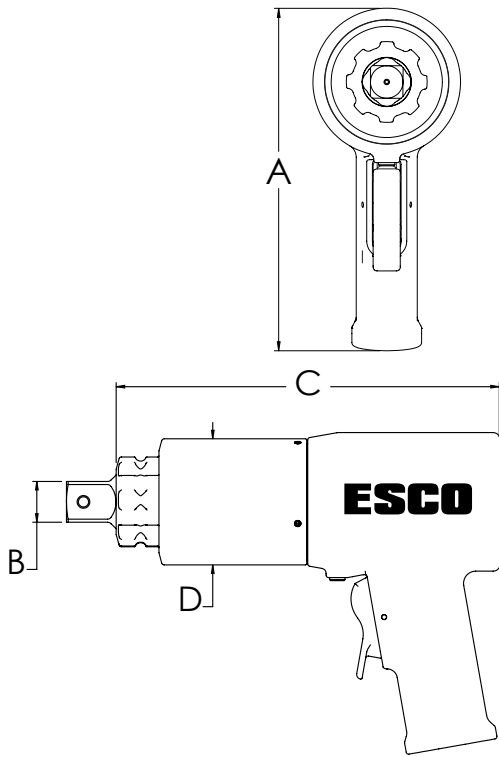


#10002 single speed
Torque range 130-530
Free speed 26-44 RPM




#10024 single speed
Torque range 300-1030
Free Speed 11-15 RPM



#10001 single speed
Torque range 460-2015
Free speed 6-9 RPM



#10015 single speed
Torque range 1005-3070
Free speed 3-4 RPM



#10017 single speed
Torque range 1525-5990
Free speed 2-3 RPM

ESCO Pneumatic Torque Wrench Kit - for HD Truck

- ▶ Extremely Accurate: Consistent Torque.
- ▶ Values +/- 5%
- ▶ Drive Size: 3/4", 1", & 1,5"
- ▶ Comes with a Heavy Duty Carrying Case.
- ▶ Range of Torque: 150 - 1000 ft lbs.
- ▶ Reversible - One Tool Does it All:
- ▶ Powerful Nut Removal / Precision Torque On.
- ▶ Designed to Torque Various Ranges of Wheel
- ▶ Types and Sizes.
- ▶ **Made in the USA**
- ▶ Lightweight Gun: 16 lbs. 7 kg
- ▶ Total Weight: 38 lbs. 17 kg

MODEL 10006
Pneumatic Torque Wrench Kit for HD Truck



MODEL 10004 Air Regulator & Hose
Included with Model 10006 Kit