
The **MAMMUT RANGE OF JACKS** offers service professionals a solution that is safe and easy to use, for all those operations to lift earthmoving, construction, quarry, and mining machinery, where maintenance requires professional skills and expertise. All models are air/hydraulic operated and equipped with a dual descent valve for greater control when bearing weight and automatic piston return; they can also be fitted with a manual emergency pump (on request).

Specifications



A	57.9 in 1473 mm	
В	21.6 in 550 mm	
С	43.4 in 1102 mm	
D	33.4 in 848 mm	
E	26.3 in 669 mm	
F	19.8 in 504 mm	
G	13.5 in 342 mm	

Accessories

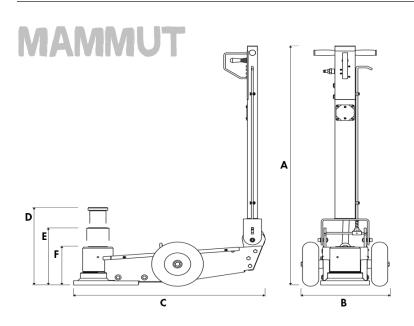

Model	Description	Specs
91033	Extension Holder R	NA
91032	Extension Holder L	NA
91038	Extension	A: 3.125 in B: 1.5 in. C: 0.75 in. A: 80mm B: 35mm C: 20mm
91026	Extension	A: 6 in B: 1.5 in C: 0.75 in A: 150mm B: 35mm C: 20mm
91027	Extension	A: 9.875 in B: 1.5 in C: 0.75 in A: 250mm B: 35mm C: 20mm
91028	Extension	A: 11.875 in B: 1.5 in C: 0.75 in A: 300mm B: 35mm C: 20mm
91042	Tilting Plate	A: 1.875 in B: 1.5 in A: 46mm B: 35mm
91006	Remote Control	NA

NOTE: ESCO reserves the right to change, alter, or modify product(s) without notice. This includes but is not limited to product: color, design, parts, accessories, etc.

sales@esco.net WWW.ESCO.NET 1.800.352.9852











