Mammut 165 Ton Jack MODEL 91007





MAMMUT

FEATURES & BENEFITS

- Lightweight, compact and easy to handle/use design.
- Folding handle for easier transport and storage.
- Large wide pneumatic tires designed for use in extreme conditions.
- Special hook for transport and easy transport of jack.
- Standard remote control for lifting and lowering jack from a safe distance away from the load.
- Accessories available See back of flyer for details.
- 100% manufactured in Italy
- One Year Warranty

MINING AND SPECIAL APPLICATIONS JACKS

MAMMUT jacks are a safe and efficient lifting solution, suitable for vehicle maintenance in the mining, industrial, rail, construction, port and military industries.

Air-hydraulic operated, all models are equipped with double descent valve for a better control and a safer holding under load, with automatic piston return.






SPECIFICATIONS

Model	91007
Style	M150-72
Capacity	165 ton 150 t
Net Weight	809 lb 367 kg
Working Air Pressure	145-174 psi 10-12 bar
Air Consumption	600 nl/min
Max. Height	42.9 in 1092 mm
Min Height	28.3 in 720 mm
Number of Pistons	1
Stroke	14.6 in 372 mm
Application	Mine and oil field, Construction site, Industrial assembly, Agricultural, Railway applications, Military
Warranty	One Year Warranty
UPC	816904025472

The **MAMMUT RANGE OF JACKS** offers service professionals a solution that is safe and easy to use, for all those operations to lift earthmoving, construction, quarry, and mining machinery, where maintenance requires professional skills and expertise. All models are air/hydraulic operated and equipped with a dual descent valve for greater control when bearing weight and automatic piston return; they can also be fitted with a manual emergency pump (on request).

Specifications

MAMMUT

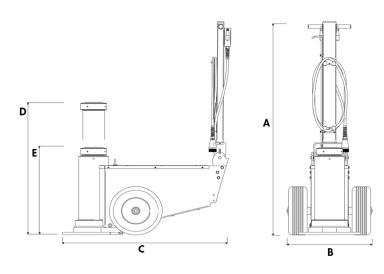

A	69.2 in 1758 mm
В	25.3 in 644 mm
С	48.1 in 1222 mm
D	42.9 in 1092 mm
E	28.3 in 720 mm

Accessories



Description	Specs
Extension Holder R	NA
Extension Holder L	NA
Tilting Plate	A: 3 in B: 2.125 in A: 77mm B: 55mm
Extension	A: 7.875 in B: 2.125 in C: 2.125 in A: 200mm B: 55mm C: 55mm
Extension	A: 9.875 in B: 2.125 in C: 2.125 in A: 250mm B: 55mm C: 55mm
Extension	A: 11.875 in B: 2.125 in C: 2.125 in A: 300mm B: 55mm C: 55mm
Safety Lock Holder	Safety Lock Holder (3) Safety Block - (H) 4 - (W) 6 in Safety Block - (H) 2 - (W) 6 in
	Extension Holder R Extension Holder L Tilting Plate Extension Extension Extension

NOTE: ESCO reserves the right to change, alter, or modify product(s) without notice. This includes but is not limited to product: color, design, parts, accessories, etc.













