


WHEEL CHOCKS commercial grade high visibility lightweight design

model 12590 | 12591 | 12592 | 12593 | 12594 | 12595 | 12597

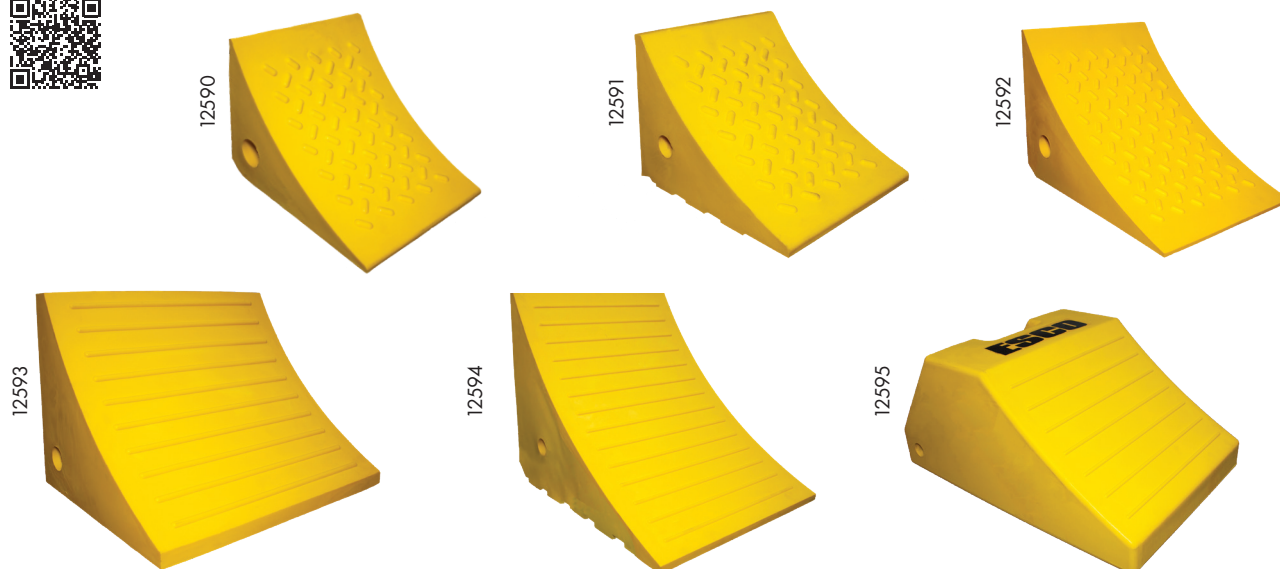

WHICH CHOCK FITS YOUR NEEDS?

EXPLORE WHEEL CHOCK APPLICATION CHART
PAGE 147.

SPECIFICATIONS:	12590	12591	12592	12593	12594	12595	12597
GVW Capacity (Gross Vehicle Weight)	5 Ton (10,000 lbs.)	10 Ton (20,000 lbs.)	20 Ton (40,000 lbs.)	60 Ton (120,000 lbs.)	120 Ton (240,000 lbs.)	250 Ton (500,000 lbs.)	20 Ton (40,000 lbs.)
Tire Sizes O.D (Outer Diameter)	Up to 27 in.	Up to 35 in.	Up to 45 in.	46 in. - 65 in.	Up to 65 in.	Up to 142 in.	Up to 45 in.
Length	8 in. 203 mm	8.5 in. 216 mm	11 in. 279 mm	12.125 in. 308 mm	16.25 in. 413 mm	22 in. 559 mm	10 in. 254 mm
Width	7 in. 178 mm	7 in. 178 mm	8 in. 203 mm	15.25 in. 387 mm	14.5 in. 368 mm	14.75 in. 375 mm	8 in. 203 mm
Height	6 in. 152.5 mm	6.25 in. 159 mm	7 in. 178 mm	10.75 in. 273 mm	13.25 in. 337 mm	10.5 in. 267 mm	6 in. 152 mm
Weight	2 lbs. 0.9 kg	3 lbs. 1.3 kg	4 lbs. 1.8 kg	16 lbs. 7.25 kg	20 lbs. 9 kg	37 lbs. 6.75 kg	9 lbs. 4 kg
Material	Polyurethane	Polyurethane	Polyurethane	Polyurethane	Polyurethane	Polyurethane	Rubber
Color	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Black
UPC	816904024321	816904024338	816904024345	816904024352	816904024369	816904024376	816904025427

RUBBER STANDARD WHEEL CHOCK

MODEL 12597

- Heavy duty molded rubber construction.
- Comes complete with eye bolt for easy rope or chain attaching.
- Sloped on both sides for easy positioning from any angle.
- Nonslip ridges for a firm grip.

