

## 2 STAGE HIGH TONNAGE AIR HYDRAULIC JACK - 66 | 33 ton capacities

**MAMMUT**

model 91001



**2-STAGE  
DESIGN**





The **MAMMUT 2-STAGE HIGH TONNAGE AIR HYDRAULIC JACK (MODEL 91001)** is designed for **ULTRA-LOW** lifting heights without compromising capacity, this jack features a robust multi-stage system for heavy-duty performance. The dual descent valve offers precise control when bearing weight, while the automatic piston return ensures smooth operation. Ideal for low profile equipment in earthmoving, construction, quarry, and mining machinery markets. This air/hydraulic jack prioritizes safety and efficiency and can also be fitted with a manual emergency pump (on request).

- Lightweight, compact and easy to handle/use design.
- Folding handle for easier transport and storage.
- Large wide pneumatic tires designed for use in extreme conditions.
- Special hook for transport and easy transport of jack.
- Available accessory for remote control lifting and lowering jack from a safe distance away from the load.
- Accessories available.
- 100% manufactured in Italy.



100% MADE IN  
ITALY

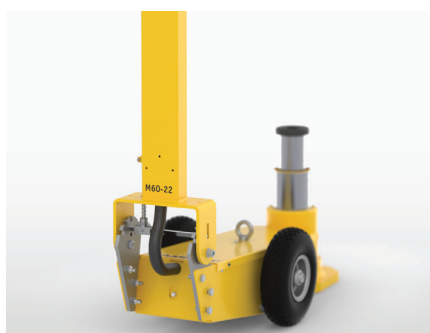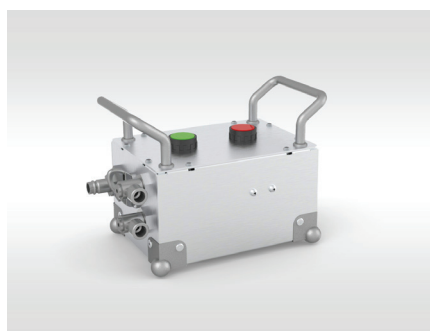

| SPECIFICATIONS:      | 91000                                                                                                    |
|----------------------|----------------------------------------------------------------------------------------------------------|
| Style                | M60-22                                                                                                   |
| Capacity             | 66/33 ton   60/30 tonne                                                                                  |
| Net Weight           | 205 lb.   93 kg                                                                                          |
| Working Air Pressure | 145-174 psi   10-12 bar                                                                                  |
| Air Consumption      | 600 nl/min                                                                                               |
| Max. Height          | 17.6 in.   448 mm                                                                                        |
| Min Height           | 8.7 in.   222 mm                                                                                         |
| Number of Pistons    | 2                                                                                                        |
| Stroke               | 8.8 in   226 mm                                                                                          |
| Application          | Mine and oil field, Construction site, Industrial assembly, Agricultural, Railway applications, Military |
| Warranty             | 1-Year Warranty                                                                                          |
| UPC                  | 816904023577                                                                                             |