

HEAVY-DUTY BEARING CAP INSTALLER - for Dana Spicer SPL 140, 170 & 250 Series Drivelines



model 40316



The **ESCO HEAVY-DUTY BEARING CAP INSTALLER (MODEL 40316)** is designed to provide removal or adjustment of tie rod ends quickly and easily, without the risk of rounding or flaring out sockets on a range of heavy-duty trucks. This unique set includes specific adapters that ensure bearing cups are pressed to the manufacturer's recommended depths.



- Easily and quickly install bearing caps and Dana/Spicer SPL quick disconnect universal joints.
- Includes three press bearing adapters designed to fit manufacturer's recommended depths.
- Designed to be used with manual and impact driven tools (up to 1 inch).
- Reduce the risk of damaging driveshafts, yokes, and joints during service.
- Made of high quality heavy duty steel capable of withstanding rigorous and daily use in shop environments.

Drive Size	1 3/8 in. 35 mm
Weight	3.3 lbs. 11.5 kg
Material	CR-MO (Chromium-Molybdenum) alloy steel & Heavy Duty Casted Steel
Application	Commonly found on class 6-8 transportation trucks and equipment. (Kenworth, Peterbilt, Freightliner, Mack, Volvo, etc.)
UPC	816904025175
Warranty	Limited Lifetime

DESIGNED TO PROVIDE REMOVAL OR ADJUSTMENT OF TIE ROD ENDS QUICKLY AND EASILY, WITHOUT THE RISK OF ROUNDING OR FLARING OUT SOCKETS ON A RANGE OF HEAVY-DUTY TRUCKS.



EASY TO INSTALL ADAPTERS
Includes specific adapters that ensure bearing caps are pressed to the manufacturer's recommended depths.

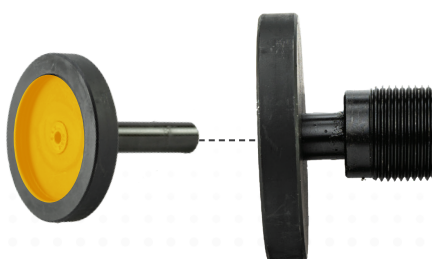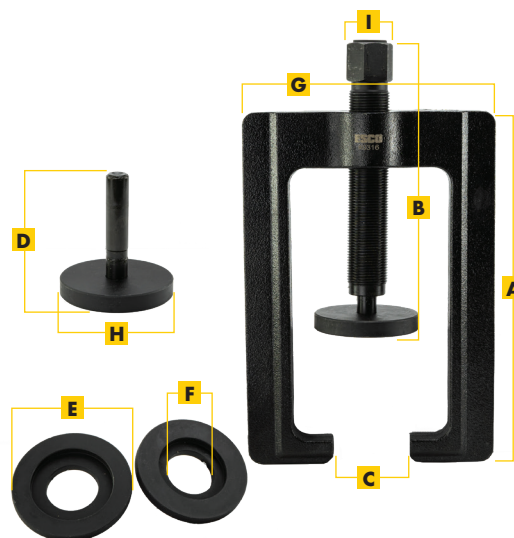

SNAP-IN BEARING CAP PRESS
Easily and Quickly install bearing caps and Dana/Spicer SPL quick disconnect universal joints.

SPECIFICATIONS:

40316

A	10 1/2 in. 267 mm	F	1 3/8 in. 35 mm
B	7 1/2 in. 190.5 mm	G	7 1/2 in. 190.5 mm
C	2 1/3 in. 59.3 mm	H	3 3/16 in. 81 mm
D	3 1/2 in. 89 mm	I	1 3/8 in. 35 mm
E	3 1/8 in. 79.4 mm		