


HEAVY DUTY TIE ROD SOCKET - for Freightliner, Kenworth, Mack, Peterbilt, and Volvo

model 40317



SPECIFICATIONS:	40317
Slot Width	1 1/4 in. 32 mm
Inner Diameter	3 in. 76 mm
Impact Drive Size	3/4 in. 19 mm
Weight	3.3 lbs. 1.5 kg
Material	CR-MO (Chromium-Molybdenum) alloy steel
Application	Commonly found on class 6-8 transportation trucks and equipment. (Kenworth, Peterbilt, Freightliner, Mack, Volvo, etc.)
UPC	816904025199
Warranty	Limited Lifetime

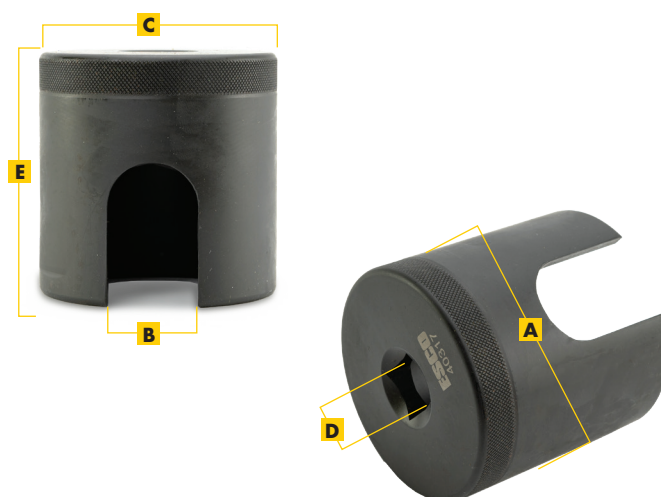

SPECIFICATIONS:			
A	3 5/6 in. 97.4 mm	D	2/3 in. 17 mm
B	1 1/2 in. 38 mm	E	1 7/8 in. 47.6 mm
C	3 5/8 in. 92 mm		

The **ESCO HEAVY DUTY TIE ROD SOCKET MODEL 40317** is designed for a wide range of heavy-duty semi-trucks and equipment to quickly remove or adjust tire rod ends without the risk of flaring or rounding out sockets.

- Quickly adjust or remove tie rod ends without flaring or rounding out sockets on extended range of heavy-duty trucks.
- Made of high quality heavy duty steel capable of withstanding rigorous and daily use in shop environments.
- Can be used with up to a 3/4-inch drive impact wrench.
- Designed to be used on Volvo, Kenworth, Peterbilt, Freightliner, Mack, and many other popular brands out in the market.

USE WITH RATCHET OR IMPACT
Designed to be used with any air ratchet or impact tool up to 3/4 inch.



LARGE INNER DIAMETER
Designed with a large 3 in. inner diameter opening for a wide range of vehicle options out on the market.

