

50 Ton Safety Locking Jack

MODEL 10808



*Lifting Capacity:
50 Ton | 100,000 lbs.*




*Carrying Handle
For Easy Positioning
of Cylinder.*

*Assembled with valve, coupler,
and base.*

Benefits & Features:

- ▶ Safety Lock Nut For Mechanical Load Holding.
- ▶ Designed for use in multiple heavy lifting applications including OTR/Mining.
- ▶ Heavy Duty Aluminum Design at a fraction of the weight.
- ▶ High Flow quick connect coupler for easy connection.
- ▶ Lightweight and Compact Design makes unit highly portable.

The ESCO Professional Aluminum Locking Collar Jacks (Cylinders) are known for their quality and lightweight durable design. The most important part of lifting a heavy load is the ability to sustain the load. While most instances support jack stands are used; the Locking Collar Jack (Cylinder) acts as its own self-contained support stand. This aids in complying with OSHA regulation 29CFR1926.305.

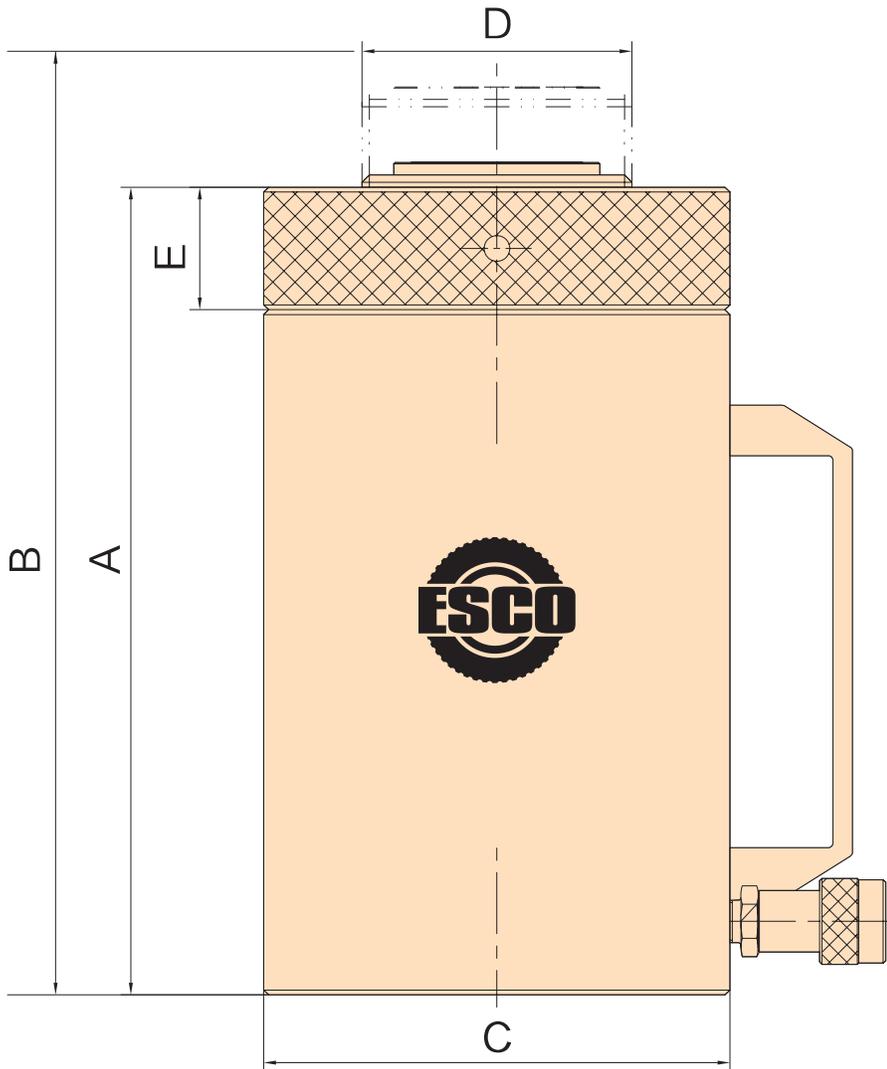

Model	10808
Capacity	50 Ton
Net Weight	26.4 lbs.
Stroke	6"
Cylinder Effective Area	10.99" (in ²)
Oil Capacity	67.07" (in ³)
Collapsed Height (A)	12.50"
Extended Height (B)	18.60"
Outside Diameter (C)	5.27"
Piston Rod Diam. (D)	Tr80x4mm
Nut Thickness (E)	1.57"