

SINGLE STAGE HIGH-LIFT AIR HYDRAULIC JACK - 33 & 55 ton capacity model(s)

model 92008 | 92043



DESIGNED FOR AGRICULTURAL AND PUBLIC WORKS VEHICLES, the pistons automatically retract, and the dual descent valves ensure perfect holding and controlled speed under load. Models 92008 and 92043 come with a roll-over protection plate and optional pneumatic wheels for challenging terrain.

- Air-hydraulic jacks pistons retract automatically.
- Dual descent valves provide stable holding in all conditions and controlled speed when under load.
- Ideal for agricultural and public works vehicles (some applications may vary).
- Features an advanced high-performance motor pump.

SPECIFICATIONS:	92008	92043
Style	YAK 135	YAK 142
Lifting Capacity	33 Ton 30 tonne	55 ton 50 tonne
Air Pressure	116-145 PSI 8-10 bar	116-145 PSI 8-10 bar
Weight	126 lbs. 57 kg	282 lbs. 128 kg
Warranty	3-Year Warranty	3-Year Warranty
UPC	816904023867	816904025861




INCLUDED ACCESSORIES MODEL 92008*:

A	1	91023	0.5 in. 10 mm Saddle
B	1	91025	4.725 in. 120 mm Extension
C	1	91024	2.75 in. 70 mm Extension
D	2	92048	Extension Holder



*For more information on YAK Accessories for model 92043, please visit www.esco.net or contact an ESCO sales representative.

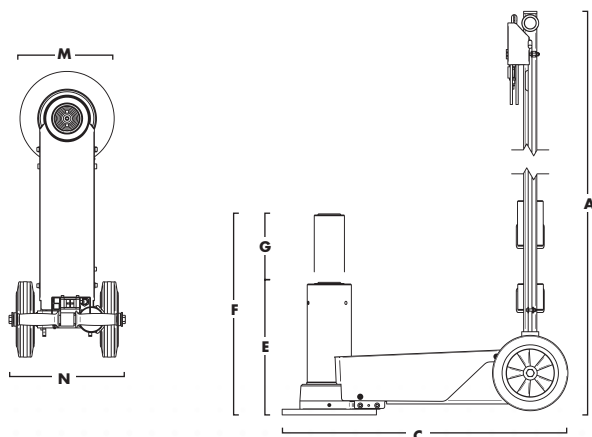

	92008	92043
A	55.91 in 1420 mm	61.14 in. 1553 mm
C	29.92 in 760 mm	43.89 in. 1115 mm
E	13.84 in 351.5 mm	16.53 in. 420 mm
F	22.55 in 573 mm	27.44 in. 697 mm
G	8.72 in 221.5 mm	10.9 in. 277 mm
M	14.17 in 360 mm	14.17 in. 360 mm
N	12.20 in 310 mm	15.35 in. 390 mm

*Maximum height without extensions.